

 STANDARD SYSTEM

 DESIGN SYSTEM

 DOUBLEDECK

 TRUSS

 WALL SYSTEM

 FLOOR SYSTEM

 FABRIC SYSTEM

 SHOWCASES

 EXPO FURNITURE

 EXPO ELECTRICAL EQUIPMENT

 ASSISTANT MATERIAL

 PACKING



LINGTONG

TRUSS



Bring Eco-friendly Display System into every show space.



Address: No. 63, Linjin Road, Yaoquan, Changzhou, Jiangsu, 213102, China
Post code: 213102
Tel: 0086-519-88702888 88702558 88702568
Fax: 0086-519-88701653
Email: lingtong@ling-tong.cn
<http://www.ling-tong.com>

LINGTONG TRUSS

Aluminum Truss



Aluminum Truss

LT-LJ290

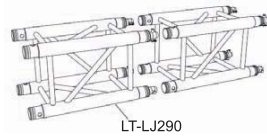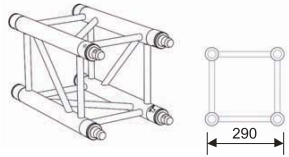



LT-LJ290 is quarto truss.
Max. length:3m,max. span:12m.
Standard size:105.5mm, 211mm,
500mm, 1000mm, 2000mm, 3000mm.

LT-LJ2911





Accessory for LT-LJ2960, connection for connector and truss.

LT-LJ2960





Box connector for quarto truss for 6 directions. Need to be connected with truss through 4 sets of LT-LJ2911.

LT-LJ2915

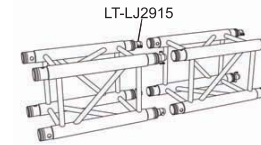



LT-LJ2915 is made of 1 coupler, 2 trusspins and 2 R-trusspins for connection of truss. Generally quarto truss and connector has been included with 4 sets of LT-LJ2915.

LT-LJ2920

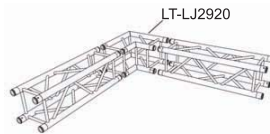


LT-LJ2920 is used for 2-way corner 90°.

LT-LJ2910





Base plate for quarto truss and can be directly connected with truss.

LT-LJ2930





LT-LJ2930 is used for 3-way corner 90°.

LT-LJ293

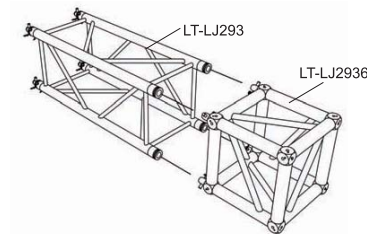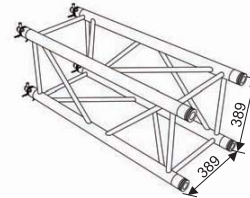


389×389mm, Standard size:1m,2m,3m with 4 LT-LJ2915.

LT-LJ2931

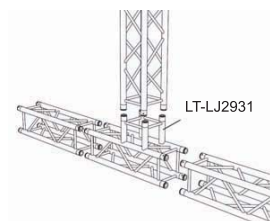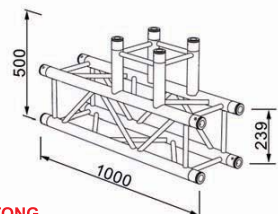

LT-LJ2931 is used for 3-way connector.

LT-LJ2936





Box connector for quarto truss for 6 directed with truss LT-LJ293, through 4 sets of LT-LJ2911.

LINGTONG TRUSS

Aluminum Truss

Aluminum Truss

LT-LJ06

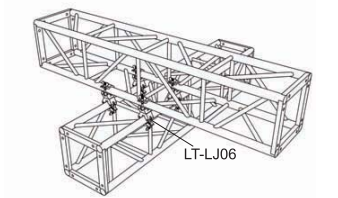



For 50mm tube of square truss.

LT-LJ5013




389mmX389mm,Standard size:2m,3m
Aluminium

LT-LJ5010

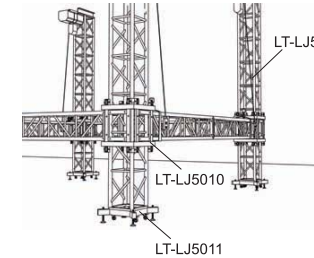


Connector for truss , connecting horizontal truss and going up and down.

LT-LJ5011





600x600mm
Base plate for truss LT-LJ5013,with 4 LT-LJ5012.

LT-LJ401A




1. Aluminum square welded truss with flange,anodized.
2.With screw M8x25 to connect.

LT-LJQ401A





1. Aluminum connector for LT-LJ401A,anodized.
Max.length:6m,max.span:12m.
2.With screw M8x25 to connect.

LT-LJ2971

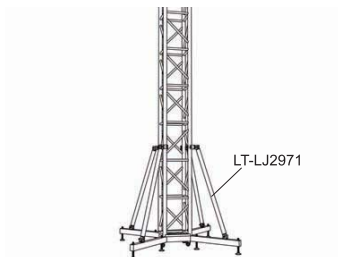



The truss is used to support diagonals and stable the whole structure.

LT-LJ2972

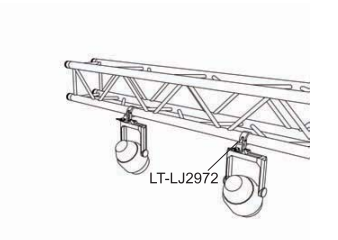

Weight: 0.280kg
Inner diameter:50mm
Load capacity:250kg
Steel

LT-LJ2973

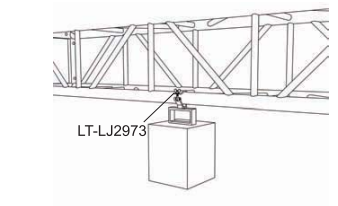



Weight: 0.090kg
Inner diameter:50mm
Load capacity:80kg
Aluminum,steel

LINGTONG TRUSS

Aluminum Truss



Aluminum Truss

LT-LJ402

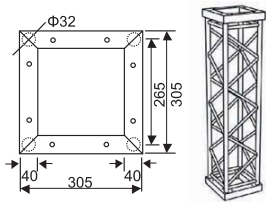



1. Aluminum square welded truss with flange, anodized. Max. length: 6m, max. span: 18m.
2. With screw M10×25 to connect.

LT-LJQ405

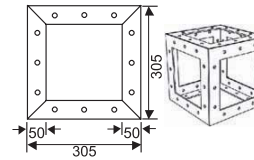



1. Aluminum connector for LT-LJ405, anodized.
2. With screw M10×25 to connect.

LT-LJ403

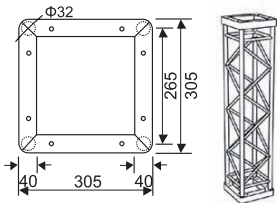



1. Aluminum square welded truss with flange, anodized. Max. length: 6m, max. span: 18m.
2. With screw M10×25 to connect.

LT-LJ415





1. Aluminum square welded truss with flange, anodized. Max. length: 6m, max. span: 18m.
2. With screw M12×25 to connect.

LT-LJQ415

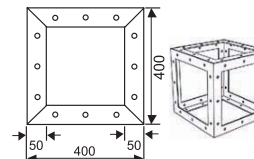



1. Aluminum connector for LT-LJ415, anodized.
2. With screw M12×25 to connect.

LT-LJQ403

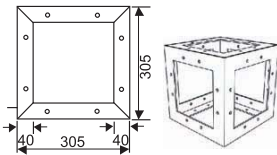

1. Aluminum connector for LT-LJ402 and LJ403, anodized.
2. With screw M10×25 to connect.

LT-LJ405


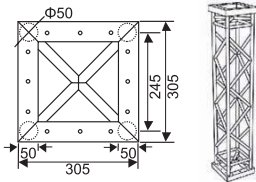


1. Aluminum quadrate welding truss with flange, anodized. Max. length: 6m, max. span: 15m.
2. With screw M10×25 to connect.

LT-LJ425A



LT-LJQ425A

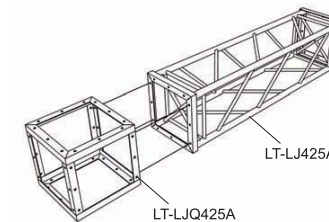

- 500×500mm
Standard size: 1m, 2m, 3m.


- Box connector for quarto truss for 6 directed with truss LT-LJ425A.

LINGTONG TRUSS

Aluminum Truss


Aluminum Truss

LT-LG204

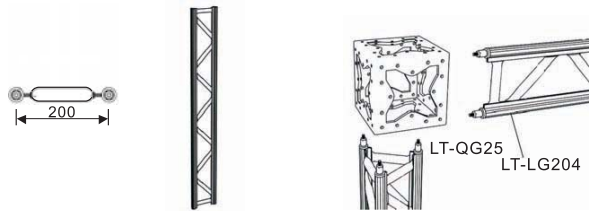


Aluminum riveted truss used as fascia beam.
Max.length:6m.
Aluminum,with LT-QG25.

LT-GZ301-308

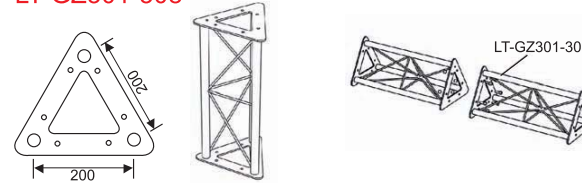


- 1.Triangular truss with flange.
- 2.Max.length:6m,max.span:9m.
- 3.Steel,powder-coated,different colors available.
- 4.With screw M8×25 to connect.

LT-LG304

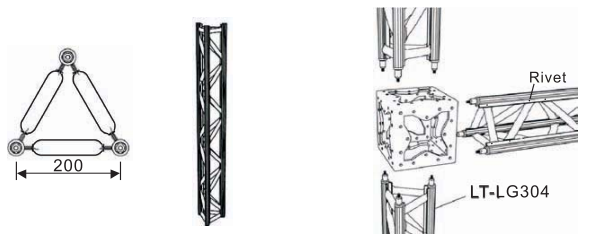


Aluminum triangular-riveted truss,anodized.
Max.span:6m,with LT-QG25.

LT-GZ411-421

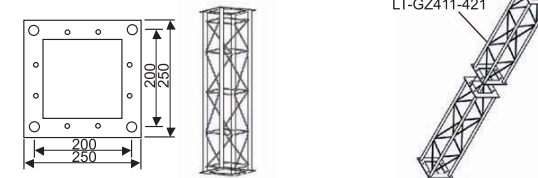


- 1.Square truss with flange.
- 2.Max.length:6m,Max.span:9m.
- 3.Steel,powder-coated,different colors available.
- 4.With screw M8×25 to connect.

LT-LG404

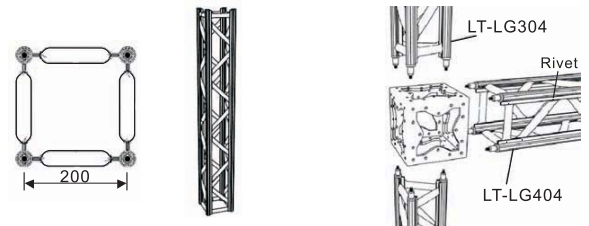


Aluminum square-riveted truss,anodized.
Max.span:6m,with LT-QG25.

LT-GZ330

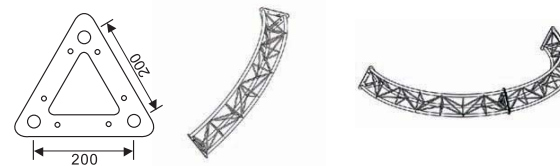


- 1.Arc triangular truss with flange.
- 2.Minim radius:1m.
- 3.Steel,powder-coated,different colors available.
- 4.With screw M8×25 to connect.

LT-GZ440

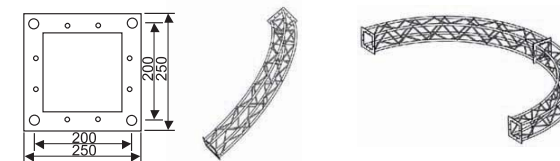


- 1.Arc square truss with flange.
- 2.Minim radius:1m.
- 3.Steel,powder-coated,different colors available.
- 4.With screw M8×25 to connect.

LT-LG600

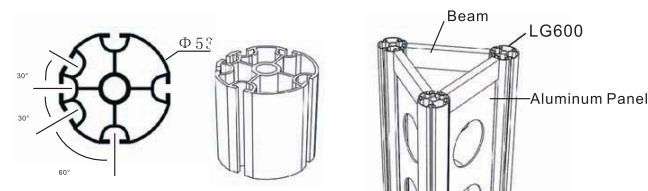

LT-LG600 can be used as extrusion for triangular inserting truss.
Max.span:6 m,
Aluminum, anodized.

LT-GW321

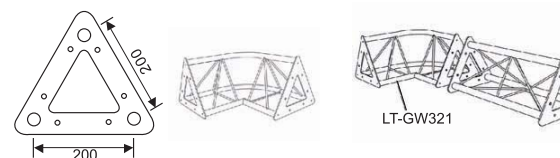



- 1.Lever right-angle connector with flange, to connect two triangular truss.
- 2.Steel,powder-coated,different colors available.
- 3.With screw M8×25 to connect.

LINGTONG TRUSS

Steel Truss



Steel Truss

LT-GW401



1. Square truss connector.
2. Steel, powder-coated, different colors available.
3. With screw M8×25 to connect.

LT-GZL401

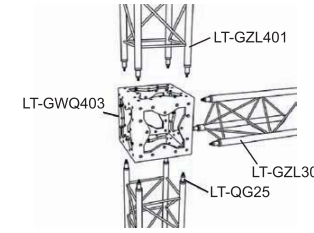


1. Square truss with connection fitting LT-QG25.
2. Max. length: 6m, max. span: 6m.
3. Steel, powder-coated, different colors available.



LT-GZ220



220×220mm, Standard size: 0.5m, 1m, 1.5m, 2m, 2.5m, 3m.

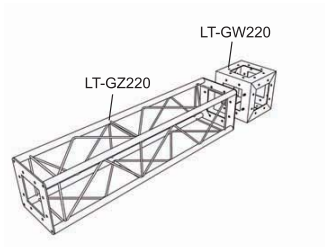


LT-QG25

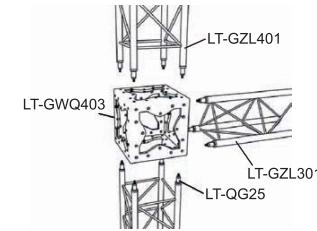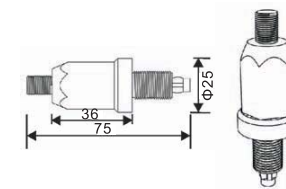




Steel connector, chrome-plated, to connect truss and LT-GWQ403 or all node.

LT-GW220



Box connector for quarto truss for 6 directed with truss LT-GZ220.

LT-GWQ403

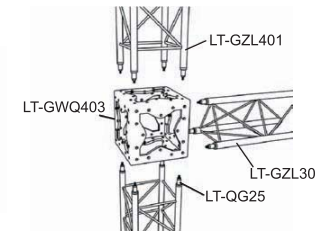


1. Versatlie connector, to connect triangular/square truss.
2. Steel, powder-coated, different colors available.

LINGTONG TRUSS

Steel Truss



Fascia Truss

LT-GZ310

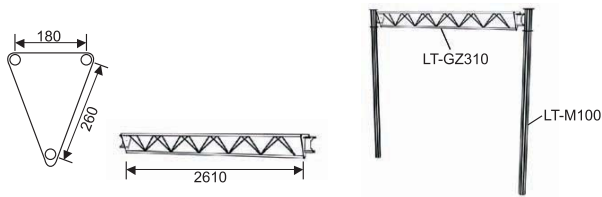

Fascia truss for 3m booth.
Power-coated, steel, different colors available.
Length: 2610mm.
Max. span: 9m.

LT-CK110

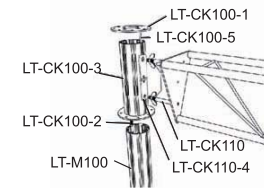



Flange for truss beam to connect upright extrusion and triangular truss, powder-coated, different colors available.

LT-GZ312




Fascia truss for 3m booth.
Power-coated, steel, panels can be inserted, different colors available.
Length: 2610mm.
Max. span: 9m.

LT-CK100-1

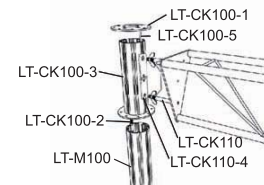



Connector plate, steel, powder-coated, different colors available.

LT-GZ320

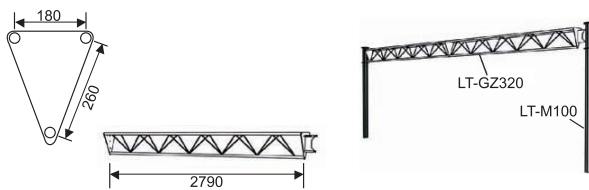


Fascia truss for 6m booth, two pcs connected.
Power-coated, steel, different colors available.
Length: 2790mm.
Max. span: 9m.

LT-CK110-4

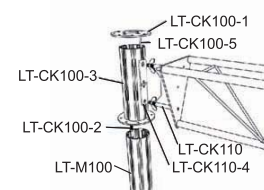


Plastic plate between connector and upright extrusion.

LT-GZ322

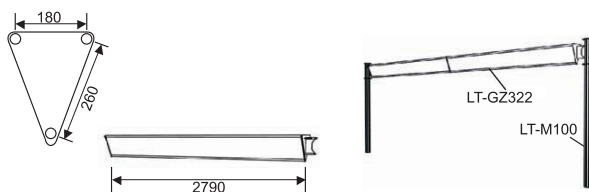

Fascia truss for 6m booth, two pcs connected.
Power-coated, steel, panels can be inserted, different colors available.
Length: 2790mm.
Max. span: 9m.

LT-CK100-3

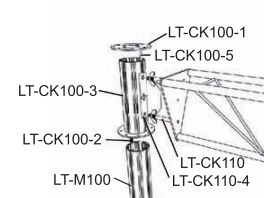



Upright connector, aluminum, anodized.

LINGTONG TRUSS

Fascia Truss



Inserting Truss

LT-CK100-2

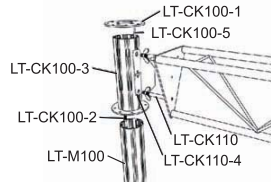



Bolt, for connect LT-CK100-3 and LT-M100. Steel, zinc plated.

LT-M200

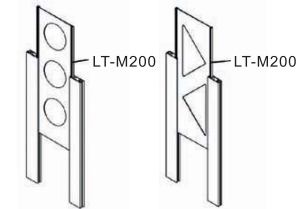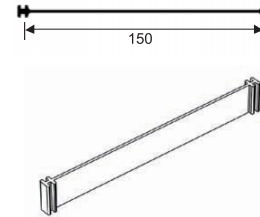



Fascia inserted extrusion/150mm(width). Aluminum, anodized. Can be punched in circle holes, triangular holes, ellipse holes.

LT-CK100-4




Antislipping plate, plastic, for LT-M100.

LT-M210

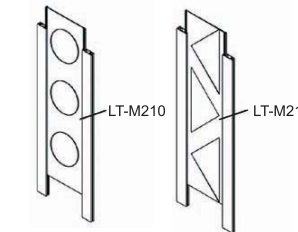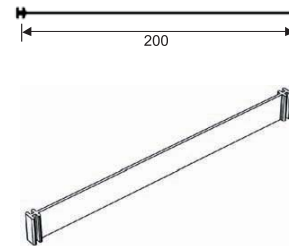



Fascia inserted extrusion/200mm(width). Aluminum, anodized. Can be punched in circle holes, triangular holes, ellipse holes.

LT-CK100-5

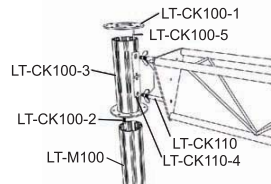


Bolt, insert in the groove of LT-CK100-3, to support LT-CK110. Steel, zinc plated.

LT-M221

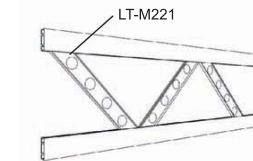



Fascia shaft. Aluminum, anodized. Can be punched in circle holes.

LT-ML1202



Aluminum, for making LT-ML703. LT-Z981/8 can be mounted in.

LT-ML703

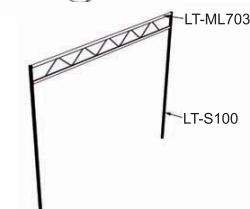



Used as flat beam in standard booth, with 4 tension locks LT-Z981/8.

LINGTONG TRUSS

Node & Truss



Node & Truss

LT-QG5-1





Standard node, $\phi 50$ mm, aluminum. With 18 tapped holes, angles between tapped hole faces $45^\circ, 60^\circ, 90^\circ, 120^\circ, 135^\circ, 180^\circ$.

LT-QG6-1

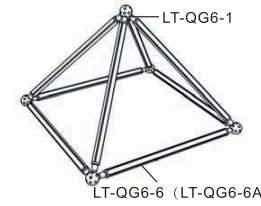




Standard node, $\phi 60$ mm, aluminum. With 18 tapped holes, angles between tapped hole faces $45^\circ, 60^\circ, 90^\circ, 120^\circ, 135^\circ, 180^\circ$.

LT-QG5-6

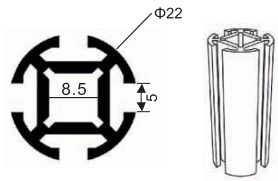



Aluminum extrusion, $\phi 22$ mm. For making LT-QG5.

LT-QG6-6

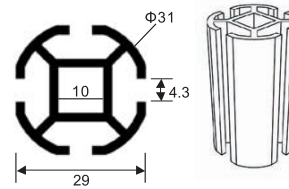




Grooved aluminum extrusion, $\phi 31$ mm. Tension lock LT-Z981 can be connected to the groove.

LT-QG5-00-1

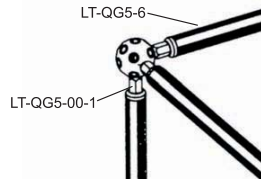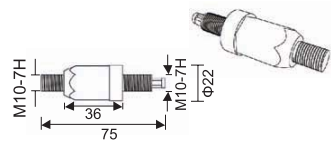



Chrome-plated connector, steel. For connecting node and tube $\phi 22$ mm.

LT-QG6-6A

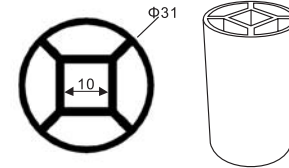



Aluminum extrusion, $\phi 31$ mm.

LT-QG5



Aluminum tube $\phi 22$ mm with LT-QG5-00-1. Standard length: 495mm, 700mm, 990mm, 1400mm.

LT-QG6-00-1


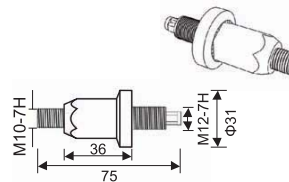


Chrome-plated connector, steel. For connecting node and tube $\phi 31$ mm.

LINGTONG TRUSS



Node & Truss

LT-QG6

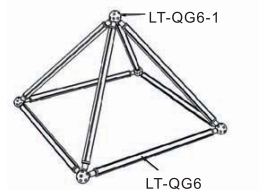



Aluminum tube $\phi 31\text{mm}$ with LT-QG6-00-1.
Standard length: 495mm, 700mm, 990mm, 1400mm.

LT-M403

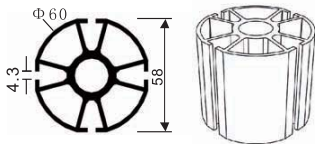



Aluminum extrusion, $\phi 60\text{mm}$. For making LT-QG10.

LT-K0603

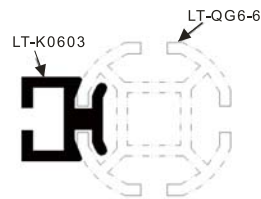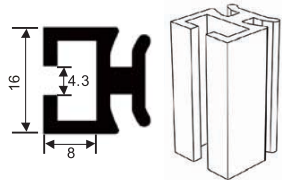



Connecting profile.
Aluminum, for LT-QG6-6.

LT-EL501



End cap for LT-QG6-6, LT-QG6-6A.
Plastic, grey or white color.





Node & Truss

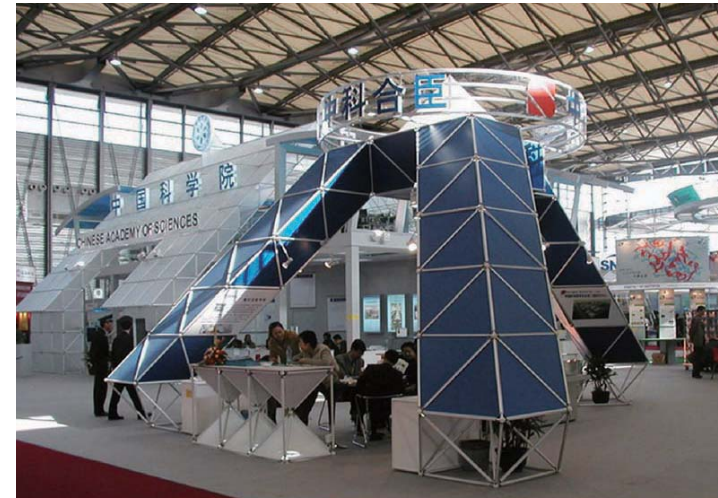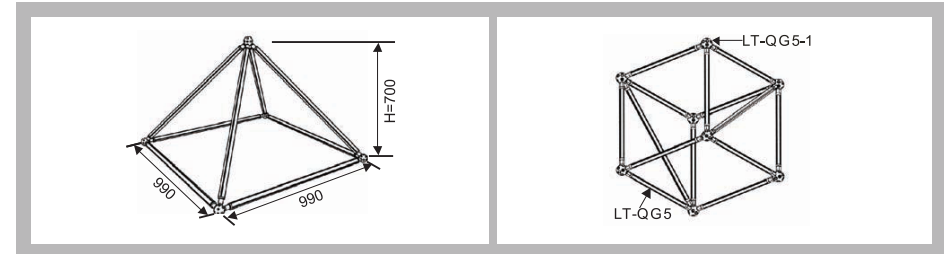

LINGTONG TRUSS

Photos

Photos

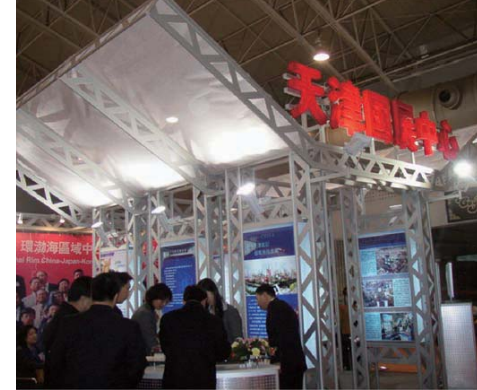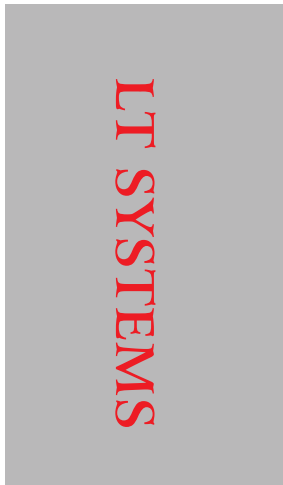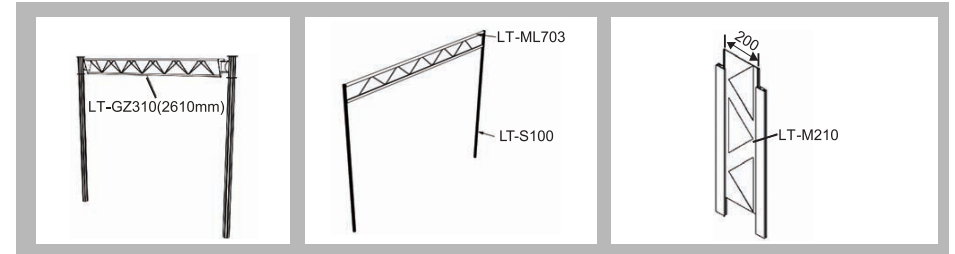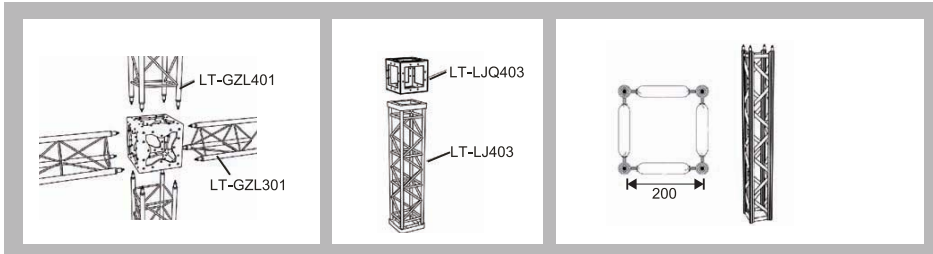


LINGTONG TRUSS


Technical Data

Technical Data


LT-LJ405

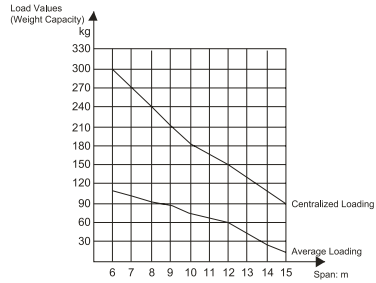


LT-LJ415

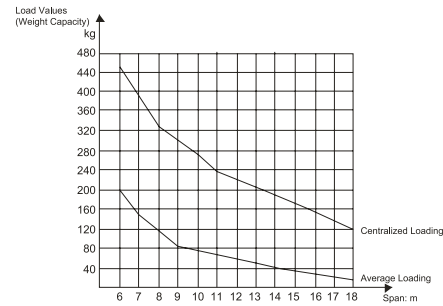


LT-GZ310

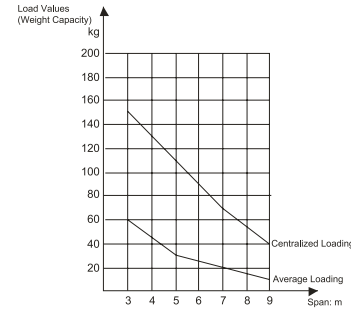


LT-LG304

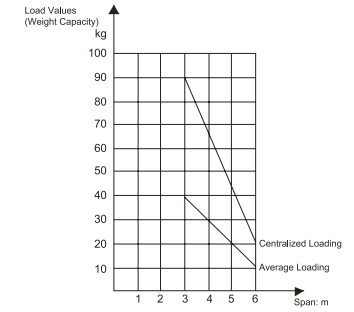


LT-LJ401A

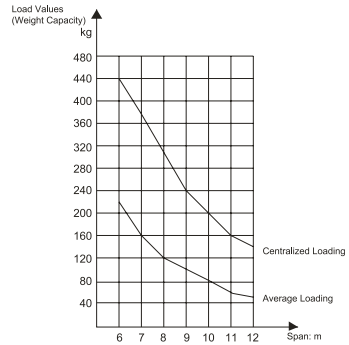


LT-LJ402,LT-LJ403

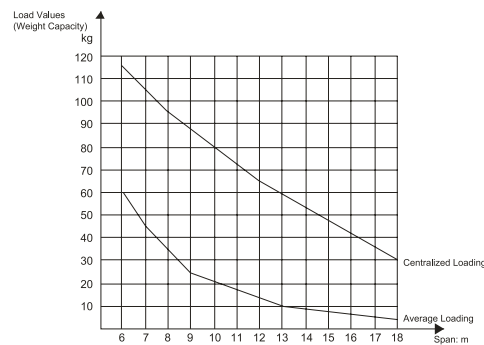


LT-LG404




LT-LJ290

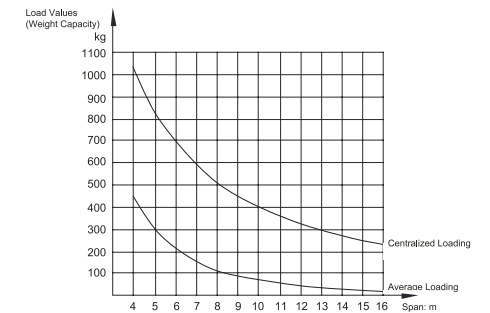


LT-GZ301-308



LT-GZ411-421



LT-LJ425A

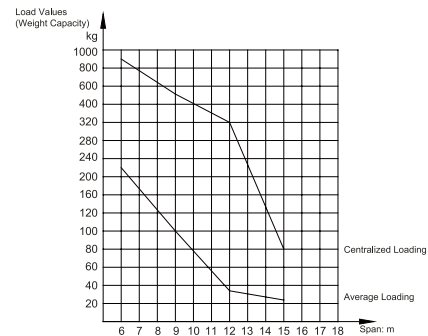

If you need detailed data, please kindly contact your sales man.